

DEMAG



Product range

Solutions for all material flow,
logistics and industrial drive requirements



A large industrial crane with a yellow and orange boom is suspended from a high ceiling in a warehouse. The crane is positioned over a series of metal tracks or runways. The background shows the structural elements of the warehouse, including steel beams and a corrugated metal roof. The lighting is bright, coming from overhead fixtures.

Major moves with new ideas

State-of-the-art material-flow solutions make it possible to optimise production processes, reduce storage and transport costs, cut delivery times and create ergonomic workplaces in companies of all sizes – from small workshops to major industrial enterprises. To meet the diversified needs of our customers, we have developed a unique product range in which everything fits together. Our materials handling components and equipment are designed in such a way that they can be used as solo components, as well as modules used to create complex system solutions.

04 Cranes

- Process cranes
- Universal cranes
- Open winch units
- Crane sets

08 Modular cranes

- KBK crane construction kit, KBK Aluline
- Pillar-mounted slewing jibs, pillar and wall-mounted slewing cranes

12 Hoists and accessories

- Rope hoists
- Chain hoists
- Operating units and controls

20 Drives

- Geared motors
- Wheel sets
- Travel unit components
- Frequency inverters
- Power supply lines

26 Service

- Tailored service concepts
- Training
- Inspections of load handling attachments and lifting accessories
- Spare parts
- Fault elimination and repairs
- Crane runway surveys
- Modernisation/refurbishment

30 Platforms

- Demag online shop
- Demag Designer tool portal

Cranes

there is virtually no alternative to the crane wherever large, heavy or awkward loads have to be handled. as classic overhead materials handling systems, on the one hand, they offer the advantage of not wasting any floor space for purely transport functions. when used together with corresponding load handling attachments, process and universal cranes can serve virtually any point within their given operating area for handling and storage tasks, for assembly purposes or for interlinking fully automated production processes.

ProCeSS CraneS

- Overhead travelling cranes, load capacities up to 470 t, spans up to 60 m
- Suspension cranes, load capacities up to 100 t
- Stacker cranes
- Maintenance installations for aircraft
- Crane installations, also fully automated, with dedicated warehouse management computers

UniverSal CraneS

- Overhead travelling and suspension cranes
 - Single and double-girder overhead travelling types
 - Profile and box-section designs
 - Load capacities up to 100 t
 - Spans up to 35 m
- Wall-mounted travelling cranes

oPen winCH UnitS/oPen winCH CrabS

- Load capacities up to 235 t

Crane enD CarriageS

- Rail-mounted units for cranes and related mechanical engineering applications
- Load capacities up to 130 t
- Tandem operation up to 250 t

Crane SetS

- Tailored component sets for suspension, single and double-girder overhead travelling cranes



**Concepts tailored
to meet your needs**



38400-2

Investment in profitability and efficiency

ProCeSS Cranes: SPeCified for inDiviDuaL re UireMentS and effiCient

Our process cranes are tailored to meet the needs of your production processes. They are designed and built to specific requirements. In this way, we ensure the highest efficiency, availability and safety for your installations. We offer cost-effective solutions for key industries with six focal applications:

- Paper industry
- Process interlinking
- Bulk material and recycling
- Aviation industry
- Steel production
- Steel handling

Control ConCePtS to Meet SPeCifiC neeDS

- Manual, ergonomic crane control by radio or from the crane cab
- Faster processes and improved safety thanks to semi-automated operating sequences with destination positioning
- Maximum handling rates and high levels of safety and reliability thanks to fully automated processes
- Demag warehouse management system with configurable storage strategies, comprehensive system visualisation and continuous inventory management



38766-5

UniverSal CraneS: tried and teSted in tHoUSanDS of inStallations

Our universal cranes provide you with quality, efficiency and reliability at the highest level. Every crane and every crane component reflects our decades of crane expertise and reliability throughout the industry.

- Single and double-girder overhead travelling cranes: load capacities up to 100 t
- Suspension cranes up to 8 t
- Wall-mounted travelling cranes up to 6.3 t

Crane SetS

Demag crane sets are packages of components tailored to meet specific customer requirements and are completed to form overhead travelling and suspension cranes using locally manufactured steelwork.

- Rapid availability and low transport costs
- User-friendly assembly on the plug-&-play principle
- For single and double crab operation
- Hoists to meet application requirements: Demag rope and chain hoists



**The right solution
for every requirement**

Modular cranes

for 50 years, the demag KBK light crane system has offered countless possibilities for handling loads quickly, ergonomically, safely and efficiently above the production level. this modular system can be combined to create individual suspension crane, suspension monorail, pillar and wall-mounted slewing jib crane, portal and stacker crane solutions.

this is demonstrated by installations tailored to meet specific application requirements, from equipment for individual workplaces to complex area-serving material flow solutions. whatever the variant, one factor always remains the same: very smooth travel and minimum operating forces. choose from profile sections made of steel and aluminium.

KbK SUSPenSion Monorails

- Load capacities up to 3,200 kg

KbK Single anD DoUble-girDer CraneS

- Load capacities up to 3,200 kg

KbK StaCker CraneS

- Load capacities up to 500 kg

KbK Portal CraneS

- Load capacities up to 3,200 kg

Pillar-MoUnTeD Slewing ibS anD CraneS

- Load capacities up to 10,000 kg
- Slewing range 270° to n x 360°
- Jib lengths up to 12 m

wall-MoUnTeD Slewing ibS

- Load capacities up to 10,000 kg
- Slewing range 180° or 270°
- Jib lengths up to 12 m

Flexible, overhead and extendible load handling

SUSPenSion Monorails: to MatCH tHe Material flow

The ideal solution for linear handling requirements. Track switches, turntables, drop sections and travel drives can be used to realise virtually any layout.

extenDing anD overHUNG CraneS: to overCoMe gravity

Areas up to 2.5 m beyond the crane runway can be easily served by using KBK Ergo components.

Single anD DoUble-girDer SUSPenSion CraneS: area-Serving, overHeaD HanDling

The most comprehensive modular system on the market provides for simple and efficient overhead materials handling. Installations can be altered and extended at any time thanks to their modular design.

Portal CraneS: Mobile anD MoDular

Our portal cranes make it possible to handle loads at changing locations. Assembled and dismantled with ease, they can be adapted to the load capacity and travel path requirements of the application thanks to the variable distance between their legs.



StaCker CraneS: Storage MaDe eaSy

Stacker cranes for simple storage, order-picking and sorting of unit loads, containers and pallets. Excellent handling of loads weighing up to 500 kg using forks, prongs or grippers that are designed to match customer requirements.

Slewing CraneS and jibs: faSt, Safe and reliable load Handling

Our pillar and wall-mounted slewing jibs and cranes are the first choice for fast, safe and reliable load handling direct at the workplace. They offer a broad spectrum of load capacities, slewing ranges and outreach dimensions.

KbK alUline

We also offer KBK profile sections in aluminium. They feature a low deadweight as well as an attractive, state-of-the-art industrial design and can be perfectly combined with our steel profile sections.



Hoists and accessories

our hoist units serve as reliable components in cranes and materials handling systems. customers in many industries all over the world rely on our technology and expertise. for good reason: we offer a unique range of products – from chain hoists to open winch units. all of them feature high efficiency and ergonomic design. with a wide variety of load capacities, speeds and equipment variants, they offer reliability and maximum safety, relieve physical strain for workers and provide for improved productivity thanks to higher handling and transport speeds.

Dr-Pro and Dr-CoM roPe HoiStS

- Monorail and double-rail travelling hoists with load capacities up to 50 t
- Double hoist units with load capacities up to 100 t
- Very high FEM service life ratings
- Two-stage pole-changing or variable-speed drives for lifting and cross-travel motions

DH HoiSt UnitS

- Monorail and double-rail travelling hoists as well as foot-mounted hoists
- Load capacities up to 100 t

DC-Pro and DC-CoM CHain HoiStS

- Load capacities up to 5,000 kg
- Lifting speeds up to 30 m/min
- Two-stage pole-changing or variable speeds
- Hook path up to 150 m (DC-Wind)

DCM-Pro ManUlift

- Load capacities up to 250 kg
- Quick-release coupling for load handling attachments
- Also with variable speeds

D-be eleCtrIC balanCer

- Load capacities up to 160 kg
- Load handling and assembly mode

D-SH SPeeDHoiSt

- Variable manual-force control or rocker switch
- Load capacities up to 160 kg
- Lifting speeds up to 70 m/min

CHain HoiSt trolleyS

travelling HoiSt tyPeS

- Push-travel and electric-travel trolleys
- Trolleys for low headroom dimensions
- Travelling hoists for handling Big Bags with extended hook lead-off
- Articulated trolleys for travel on curved tracks
- Double chain hoists for mechanically synchronised spreader bar operation
- Quadro chain hoists with four synchronised hook lead-offs

Control DeviCeS

- Cable-connected control pendants
- Wireless control systems
 - Infrared system
 - Radio-controlled system
- Electric control systems

load HanDling attaCHMentS


- Pantograph tongs
- Parallel gripper systems
- Compact magnets (battery, permanent magnets)

eleCtrIC and eleCtroniC CoMPonentS

- Overload protection devices
- Geared limit switches
- Wireless signal transmission



**Improved productivity
thanks to higher speeds**

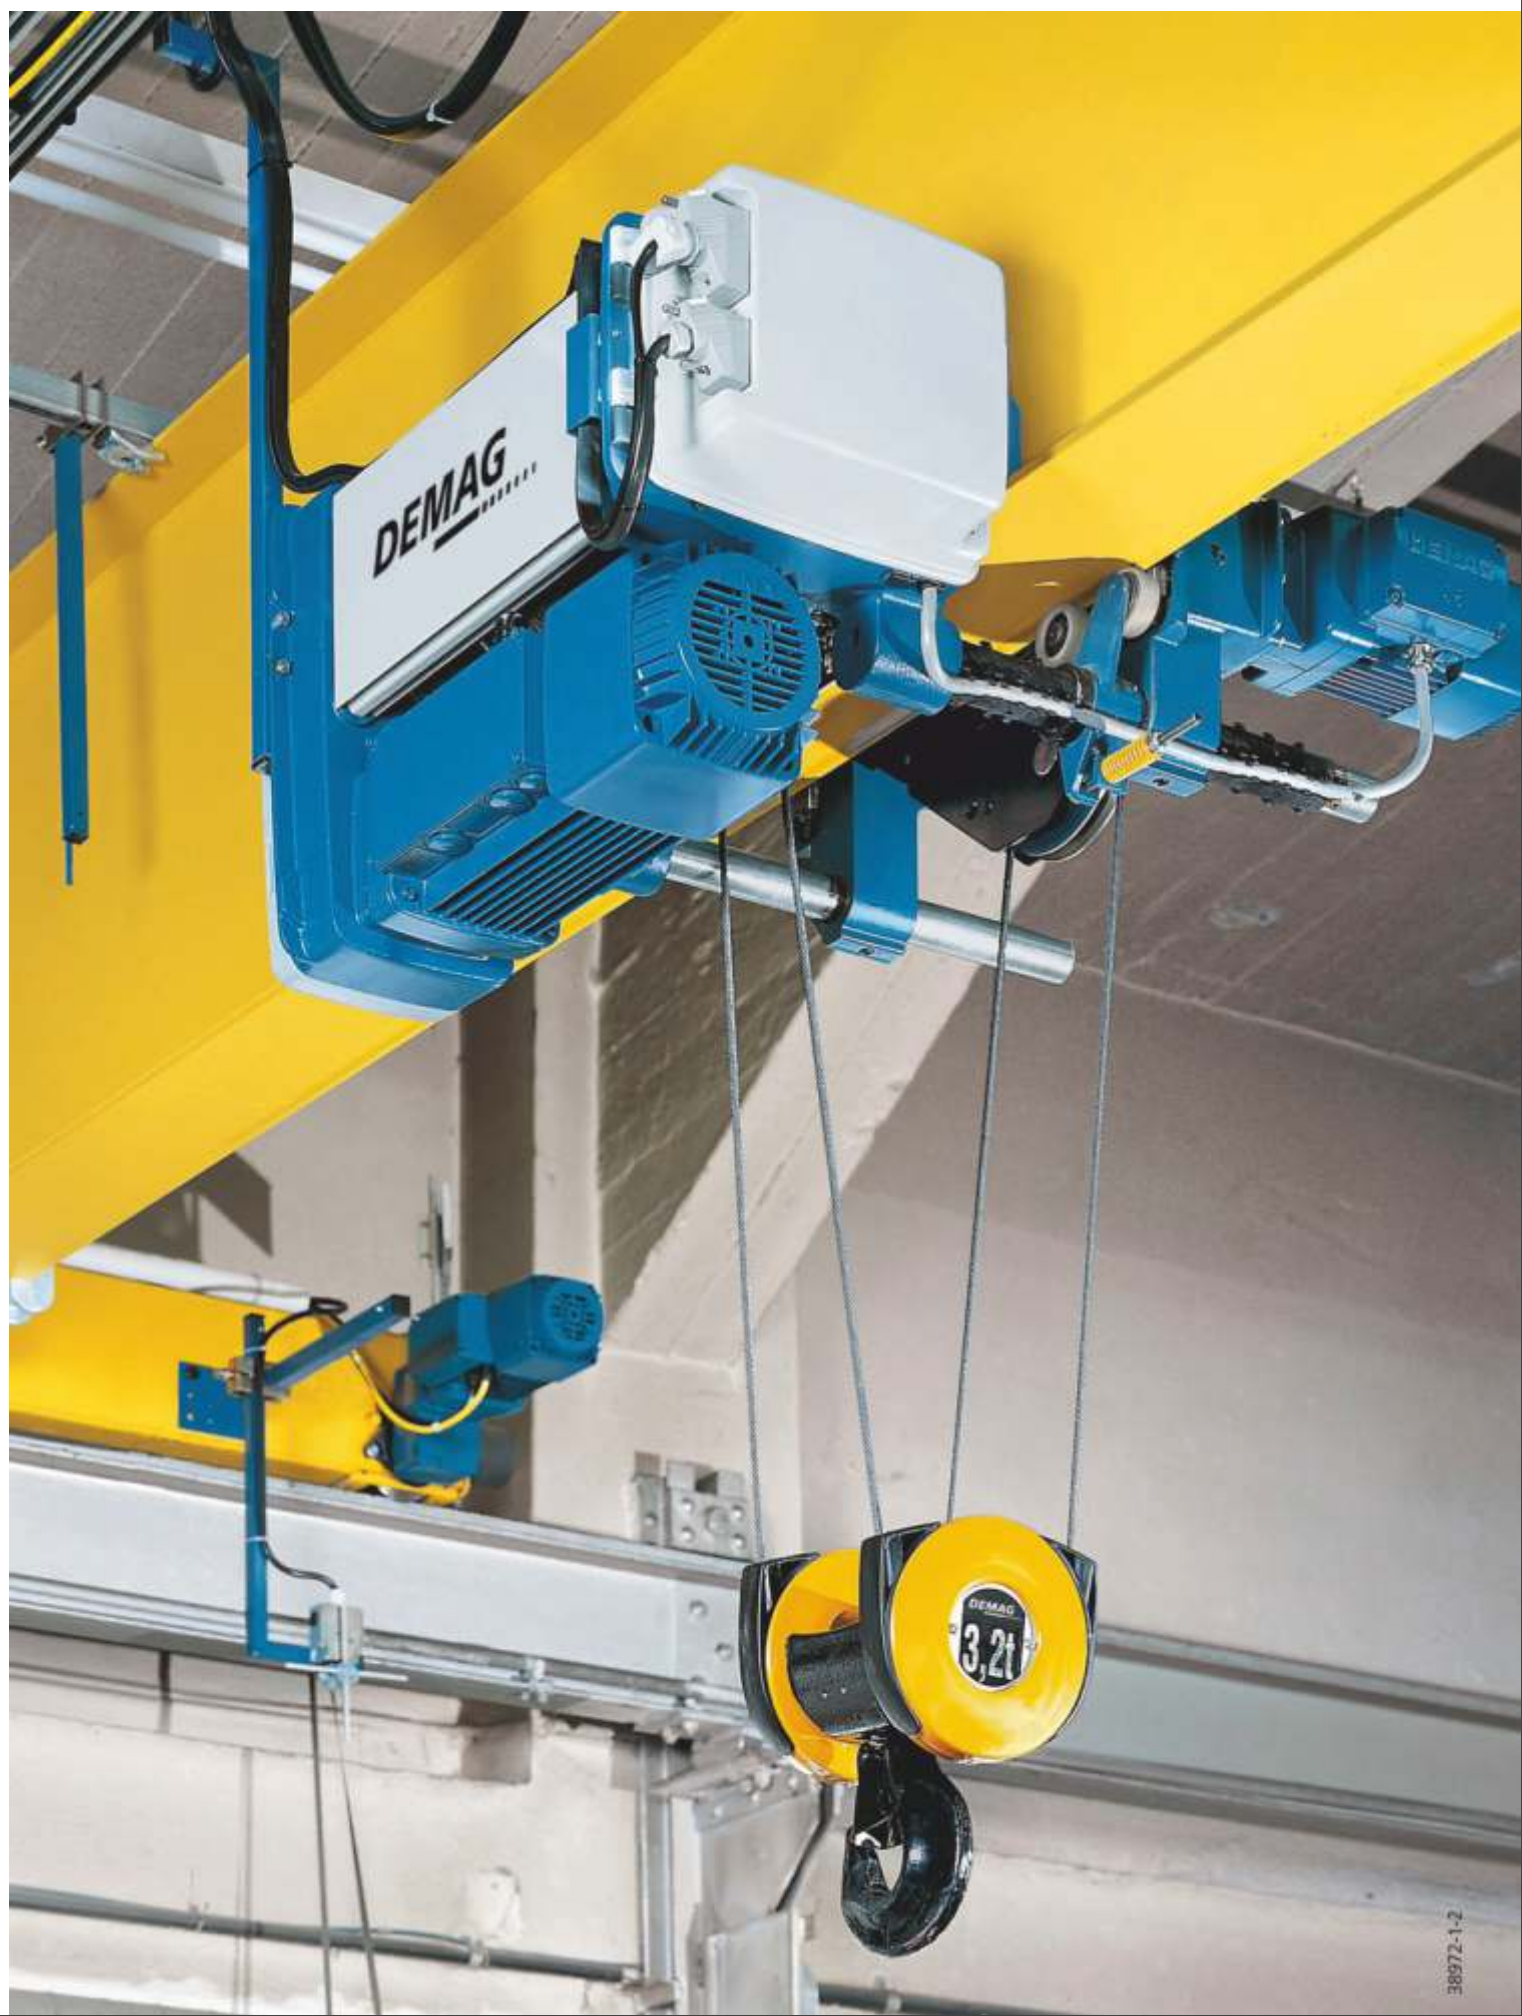

The right hoist for every application

Dr-Pro and Dr-CoM rope Hoists:

UniverSal aPPLiCation

DR rope hoists are available in many varieties and can be used for solutions that are tailored to meet the specific requirements of each application.

- Load capacities up to 50 t and 100 t for double hoist units
- Minimum approach dimensions for crane applications
- High lifting speeds up to 25 m/min
- Supplied as monorail and double-rail travelling hoists or foot-mounted hoists
- Control variants
 - Processor/CAN-bus control system
 - Contactor control
- Operation via cable-connected control pendant or radio control

DH Hoist Units: for extreMe loadS

Our DH hoist units can be used for a wide variety of applications and offer a number of special technical features that enable loads to be handled reliably even for demanding requirements.

- Load capacities up to 100 t
- Rope lead-off possible in any direction
- Hook path up to 104 m
- Individual creep speed with high duty factor and stop/start frequency thanks to mechanical microspeed unit



ProCeSSor Control benefitS

- Monitoring for installation transparency
- Simple modification for changed operating conditions
- Integrated diagnostics tool
- High levels of process reliability
- Safety category 3 possible thanks to dual-processor system

Stationary hoist unit as an installation component



Semi-automatic monorail circuit with rope hoists in tandem operation





Double chain hoists operating in tandem for handling spreader bars



Articulated trolleys: low headroom dimension with infinitely variable speed

DC-Pro and DC-CoM CHain HoiStS: High Safety & reliability and SiMPle oPeration

DC chain hoists are extremely robust and rated for a long service life. They feature very high safety standards and rapid commissioning, coupled with ease of maintenance.

- Comprehensive standard scope of delivery and wide product range
- Ease of operation thanks to ergonomic control pendants and dedicated radio control
- **DCS-Pro:** variable speed control for gentle positioning and higher speeds in the partial load range

D-be eleCtrIC balanCerS: SiMPle and PreCiSe PoSitioning

The electric balancer enables loads to be conveniently and safely handled as well as positioned with millimetre accuracy.

- Unique ease of operation thanks to load handling and assembly modes for perfect manipulation of loads
- Intuitive lifting and lowering motions without the need to press buttons

DCM-Pro ManUlift: Convenient Single-HanDeD oPeration

Thanks to the control unit which is rigidly connected to the load handling attachment for right and left-handed operation, the chain hoist can be operated and the load guided with only one hand.

- Quick-release coupling for simply swapping various load handling attachments
- **DCMS-Pro Manulift:** variable lifting speeds

D-SH SPeeDHoiSt: very faSt load HanDling

The D-SH SpeedHoist is an electric rope winch for fast and frequent load handling.

- Up to 80 kg at 70 m/min
- Up to 160 kg at 35 m/min
- Variable manual-force control or operation via a rocker switch

**Universal application
also in plant engineering**



40967-5



Operating units and controls

DSK Control PenDantS: ergonoMiC aND reliable

Cable-connected solution, ideal for the control of hoist units from the ground or for the control of machinery.

- High level of safety
- For direct or contactor control
- Can be configured to meet a wide range of specific needs

DSt Control PenDantS: for UniverSal aPPLiCation

Universal, cable-connected control pendants for cranes, hoist units and machinery.

- Three sizes with up to nine operating and switching elements
- High switching capacity
- Versatile combinations for utilisation
- For direct and contactor control
- High level of operating safety

DSe Control PenDantS: HigH reSiStanCe to iMP aCtS

Ergonomic, cable connected control unit for hoist units and machinery

- Available in two variants:
 - **DSe-10-C/CS** with "triState" interface
 - **DSe-10r** with CAN bus interface
- Particularly ergonomic design for safe and fatigue-free operation
- Housing that is highly resistant to impacts
- Comprehensive accessories for operation in harsh environments and for protection against fluids and aggressive media

DrC raDio ControlS: reliable aND Convenient

Versatile alternative equally suitable for controlling cranes, hoists, doors, machinery and installations

- Optional pushbutton or joystick transmitter units
- High level of safety thanks to greater distance to the load
- Highly reliable data transmission thanks to frequency hopping
- Rugged housings
- Ergonomic design
- Fast and simple commissioning
- Stop function corresponds to category 3: PLd (EN 13849-1)

ir infrared Control SySteM: UnliMiteD Control

Decisive benefits under all conditions:

- Simultaneous operation of up to 32 transmitters without frequency overlap
- Multiple transmitter operation with monitored transmitter switchover
- Improved safety by means of range limitation

HigH level of inStallation tranSP arenCy tHanKS to integrated DiSPlay

Comprehensive diagnostics during operation and documentation of installation status thanks to

- Bi-directional signal transmission
- High-contrast display to
 - Display status of the installation
 - Show warning messages
 - For radio control: graphic display of battery capacity



39602-1



39211-1-1



39589-4



40791-1



39306-1

Drives

with our demag industrial drives, we offer a wide range of products – from sub-assemblies to complete systems. these include motors, gearboxes and wheel systems. these components can be combined to create complete travel units. frequency inverters and power supply lines round off our portfolio. Perfect drive element combinations and sophisticated controls provide for efficient integrated systems. we use our modular drive system to provide solutions to meet specific requirements on the basis of standardised sub-assemblies. this saves you valuable project engineering time and gives you the certainty of reliable product specification.

geared MotorS

- Output range from 0.18 to 45 kW
- D helical geared motors from 90 to 5,800 Nm
- W angular geared motors from 120 to 12,000 Nm
- A offset geared motors from 130 to 11,500 Nm

gearboxeS

- Helical, angular and offset gearboxes with a wide range of transmission ratios
- Torque ranges from 90 to 12,000 Nm

MiCroSPeeD DriveS

- With conical-rotor brake motors for wide speed ranges
- Positioning with high stopping accuracy
- Speed ratios up to 500 : 1

braKe MotorS

- Conical-rotor and cylindrical-rotor brake motors up to 45 kW

eleCtrIC MotorS

- AC motors up to 45 kW
- Two, four, six and eight poles or pole-changing

Crane enD CarriageS

- Rail-mounted units for cranes and related mechanical engineering applications
- Standardised solutions up to 130 t
- Tandem operation up to 250 t

travel Unit CoMPonentS

- Wheel blocks, travel wheel systems and wheel sets for applications with load capacities up to 60,000 kg per wheel


fre UenCy inverterS

- For infinitely variable speed control of series three-phase motors as single or groups of drives for stopping and starting applications
- Motor shaft outputs up to 560 kW
- Current loads from 2.4 to 210 A or from 4.2 to 544 A
- Dedrive Compact STO and Dedrive Pro ranges

Power SUPPLY lineS

- Demag DCL-Pro compact line:
 - For currents up to 200 A in continuous operation
 - Up to seven conductors to supply power and control signals
- Demag DKK compact conductor line
- Demag DEL single conductors

Keeping things on the move

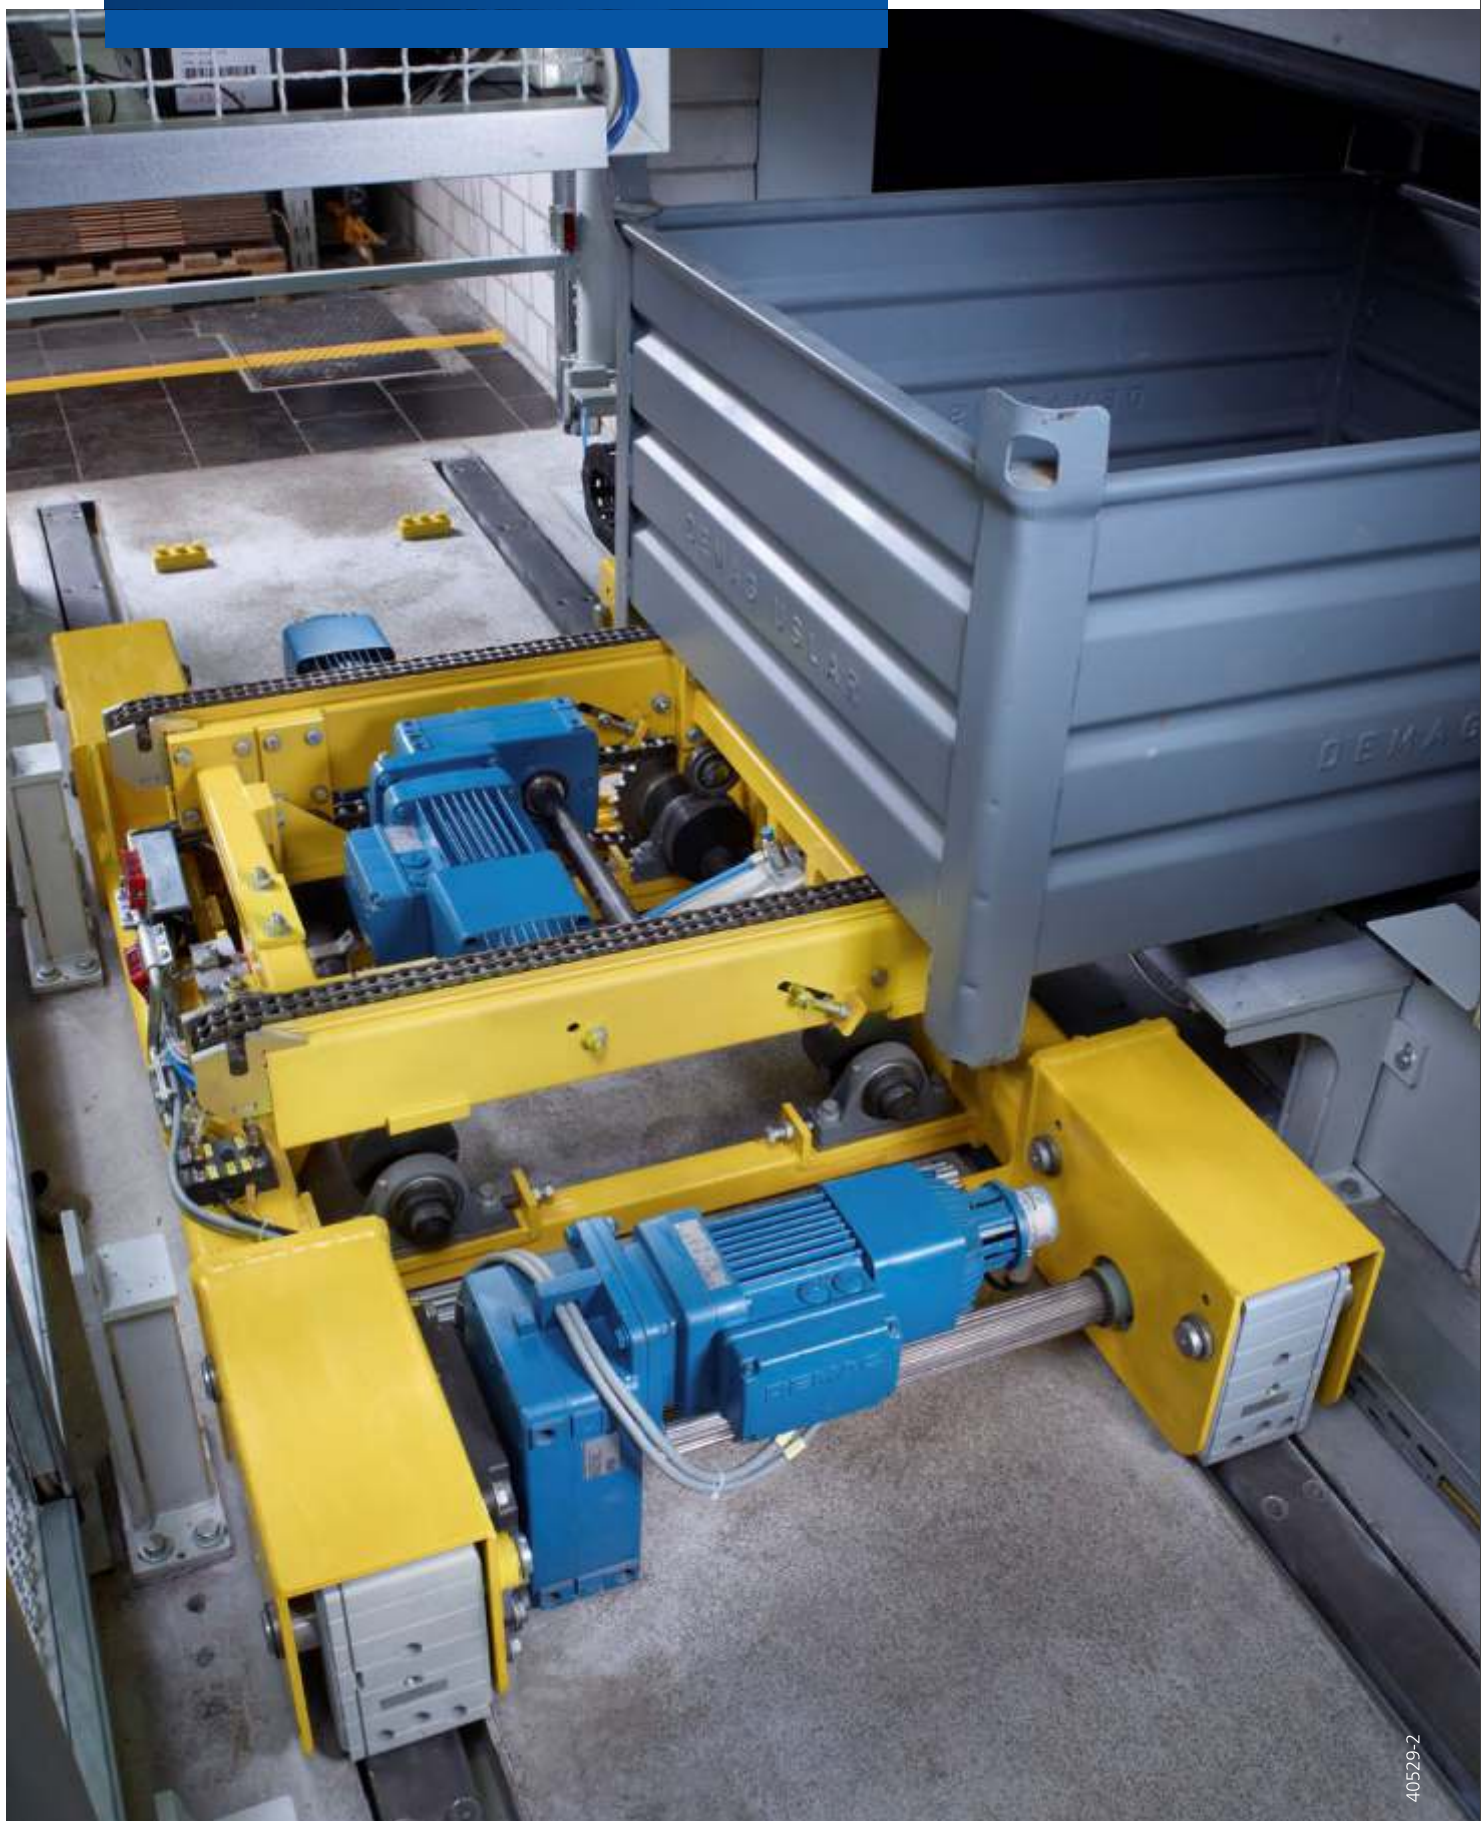



39983-8

Driving to the point


geared MotorS: PreCiSe andD gentle

Outstanding line-fed travel motors for one or two speeds, conical-rotor brake motors for the most demanding requirements in stopping and starting applications and cylindrical-rotor brake motors for standard applications.

Precisely matched to the Demag product range for your solutions from a single source.

energy effiCienCy

All Demag motors are, of course, developed and manufactured to use energy effectively and guarantee a high level of efficiency. In this way, they help to ensure that efficient and environmentally friendly drive solutions are achieved.

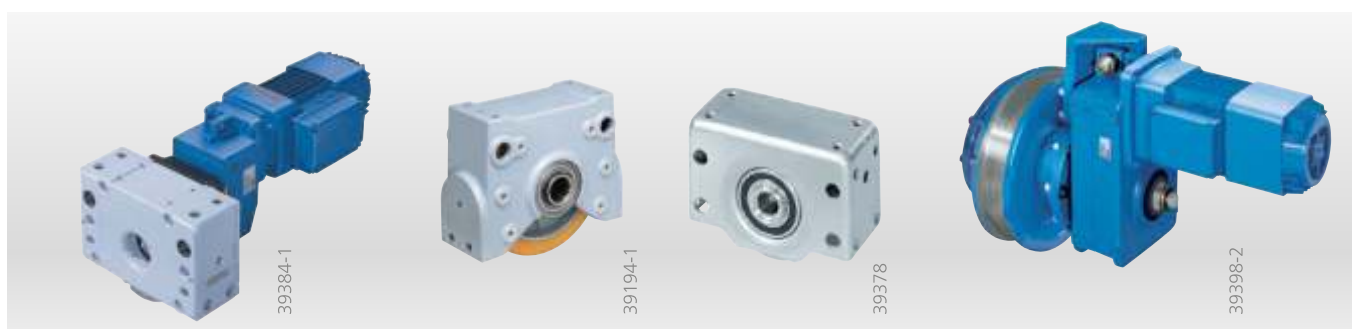

39384-1

39194-1

39378

39398-2



Architecture in motion with Demag travel units, consisting of an angular geared motor, integrated wheel block and guide rollers

DrS wHeel bloCK SySteM: MoDular variantS for tailor-MaDe SolutionS

Versatile series-produced assemblies for travel units.

- Wheel loads up to 40,000 kg
- Eight models

IrS travel wHeel SySteM: toUgH and UniverSal

Robust and universal solution that is easy to specify, for a wide range of applications.



- Load capacity range up to 6,500 kg

rS wHeel bloCK SySteM: SPeCial aPPLiCationS

- Stainless steel or sheet-steel design, e.g. for high-temperature applications
- Load capacities up to 18,000 kg

DwS wHeel SetS: MaxiMUM load CaP aCities

- Ideal for applications in the load range up to 60,000 kg





DeMag fre UenCy inverterS: High PerforManCe and SMart oPeration

Demag Dedrive Compact STO and Dedrive Pro frequency inverters provide high performance and a wide variety of functions. Besides their large performance range, they include many smart crane functions for solutions to meet your travel and lifting application needs:

- Vector control for highly dynamic starting-and-stopping applications
- ProHub – load-dependent lifting speed with field weakening
- Master/slave function for double hoist units operating in tandem
- Load spectrum calculation depending on the load and speed

DeMag DeDrive CoMP aCt Sto: exaCt PoSitioning

- Line voltages from 380 to 480 V
- Motor outputs up to 110 kW

Dedrive Compact STO frequency inverters position loads with millimetre accuracy. Specific travel profiles can be used to approach up to 32 target positions.

DeMag DeDrive Pro: DireCt tor Ue Control

- Line voltages from 380 to 690 V
- Motor outputs up to 560 kW

Direct torque control for the fastest control of asynchronous motors.

Safe tor Ue off Safety fUnCtion

The STO safety function (Safe Torque Off to EN 61800-5-2) is integrated in Dedrive Compact STO units as standard and also available as an option for Dedrive Pro units. It switches the drive torque off and prevents any unexpected start-up by the drive.

aPPLiCation MoDUleS

Demag frequency inverters are also available as integral components for application modules. The standard design is already suitable for travel and lifting applications. In addition, the extended standard is also suitable for synchronised operation of hoist drives and for distributing loads between coupled drives.



41003-6

DCL-Pro CoMP aCt ConDUctor line: eaSy to aSseMble and ServiCe frienDly

Reliable electric power supply to mobile equipment on straight and curved tracks.

- Up to seven conductors
- Supply of continuous current up to 200 A
- Six different sizes/cross-sections (10, 15, 25, 38, 56 and 70 mm²)
- **Smart interfaces:**
 - Simplified installation thanks to patented and pre-assembled connectors
 - Significant reduction in assembly times thanks to rail connector locating arrangement
 - Additional expansion joints do not need to be installed

otHer Power SUPPLY SySteMS

- **Demag DKK compact conductor lines:** ideal for higher ambient temperatures
- **Demag Del single conductors:** for universal and versatile use

Power supply for storage and retrieval machines with DCL-Pro



40610-10

ProDUCT benefitS:

- High rigidity for low deadweight
- Reliable expansion compensation at each joint
- Long service life thanks to optimised current collector trolley design
- For speeds up to 200 m/min
- System can be inspected at every joint
- Rapid replacement of straight sections
- Power infeed at the ends or in the middle of the line
- Precise attachment to C-section rails or by means of threaded pins
- Existing installations can be easily extended thanks to compatibility with previous DCL model

Service


we offer you a wide range of innovative services to cover the entire life cycle of your installations. from a single source. and the same applies to cranes, hoists, load handling attachments and related components of our demag brand and to products supplied by other manufacturers. our goal is to enable you to concentrate fully on your core business by giving you the certainty that your installations operate reliably, efficiently and without any faults or malfunctions.


Our service consultants support you with a wide range of industry-specific expertise to incorporate your individual requirements into an optimum service strategy. Demag service engineers are extensively trained and receive continuous further training to maintain their qualifications. The result is extremely high-quality service from a single source.

With Demag brand cranes and hoists, we have the largest installed base worldwide. For this reason, our service organisation is also represented all over the world, with more than 2,300 service technicians and engineers and reliable spare parts logistics systems – always in your vicinity.

oUr ServiCe ProviDeS yoU with:

- Maximum availability of your installations
- Cost-effective operation
- Maximum safety and reliability
- Efficient utilisation
- Long-term maintenance of your investment

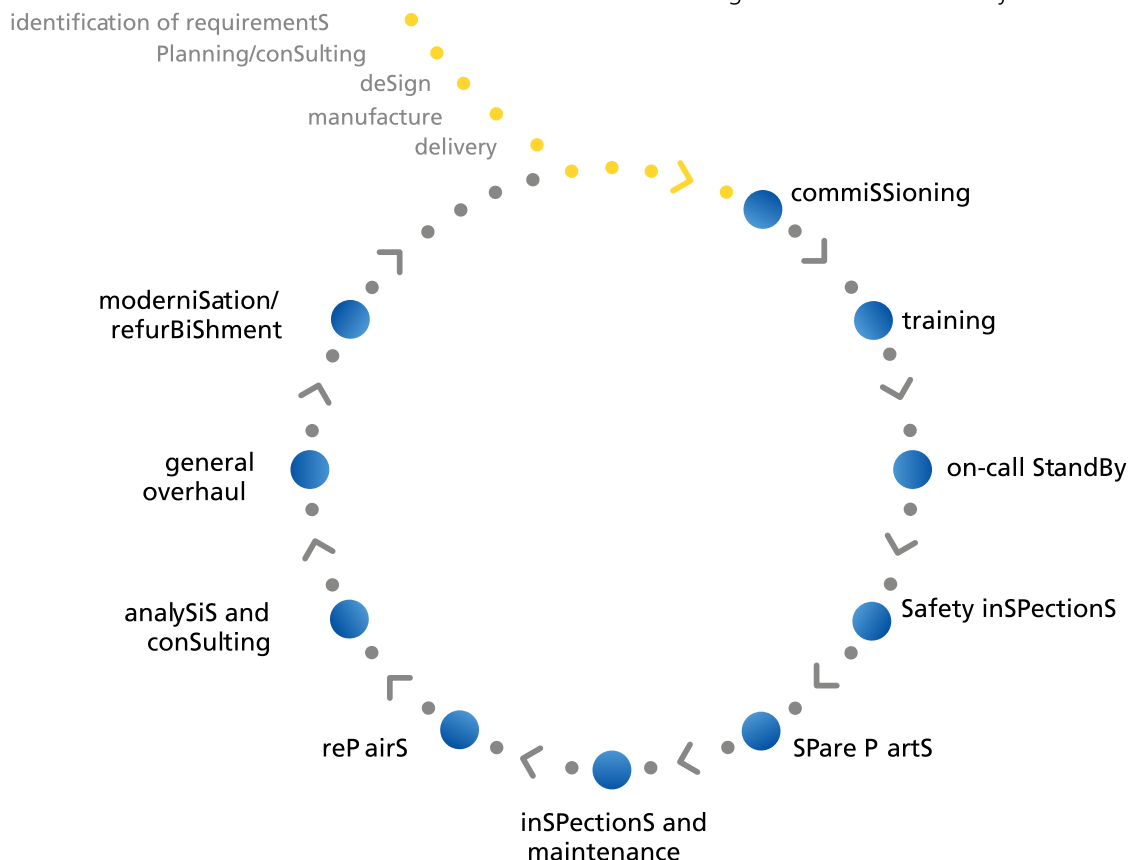

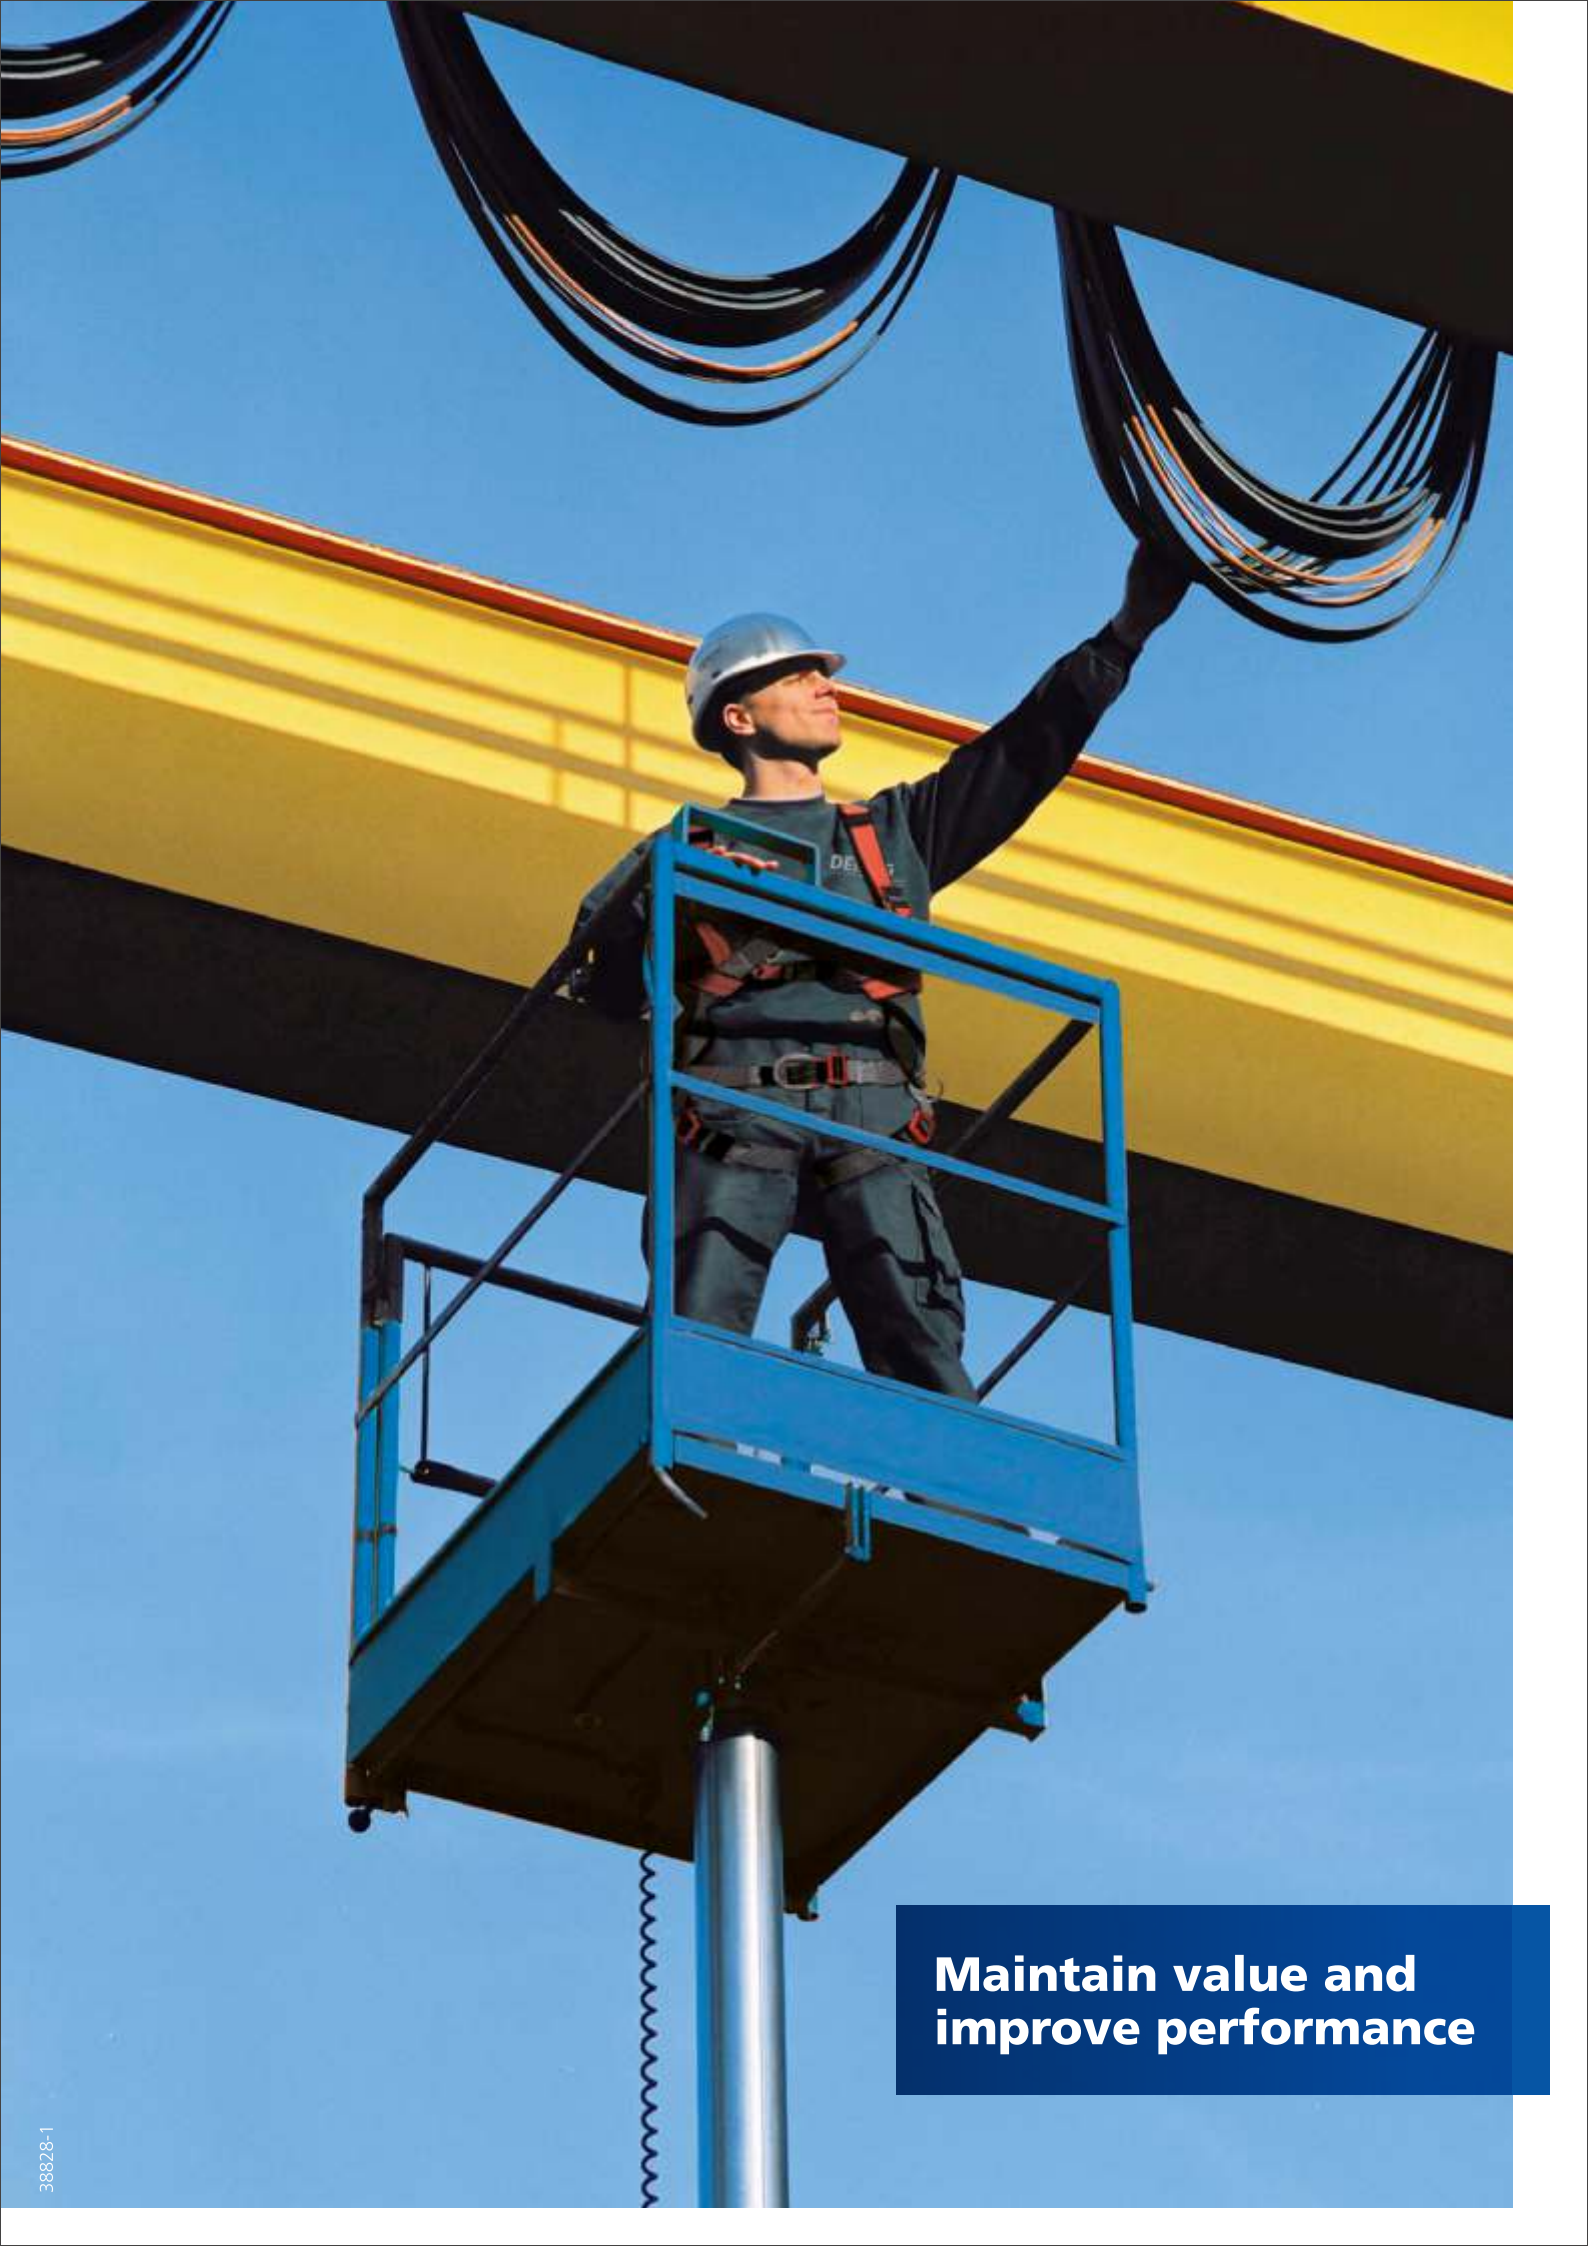

**Maintain value and
improve performance**



40317-20

Complete product care – for all brands and types

tailored Service Concepts

We provide concepts tailored to meet individual customer requirements to ensure the high availability of installations and maximum safety for owners and operating personnel. Downtimes are cut to a minimum by means of regular preventive maintenance, safety inspections and rapid elimination of faults. The Demag Service Platform offers an improved overview and transparency to manage your installation.

training

All product and operator training courses focus on safety for man and machinery. All of the specialist knowledge needed for the safe operation and maintenance of cranes and components is taught in a wide range of customer and industry-specific courses.

inspections of load Handling attachments and lifting accessories

The specially trained service technicians from our mobile Demag S3 Service test your load handling attachments and lifting accessories in accordance with relevant regulations and using state-of-the-art testing methods. The results are documented in the system and any defects that are found are either eliminated direct on site or at our Demag Repair Centre.

Spare Parts

A reliable supply of genuine spare parts ensures that faults are rectified and downtimes are kept to a minimum. You can obtain Demag spare parts particularly quickly via our express spare parts service, via our simple and convenient Demag Shop system (www.demagshop.com) or direct via your contacts in our regional offices.



faUlt eliMination and reP airS

The sudden failure of even the smallest component can bring complex systems to an unexpected standstill and threaten productivity. Demag Service ensures that faults are quickly eliminated wherever they occur – direct on site or in our Demag repair centre.

analySiS and ConSUltIng

Maximise the benefits offered by your equipment – with our expertise as a leading manufacturer of cranes and hoists. Our analysis always starts by focussing on your needs, to ensure that your equipment can operate smoothly and efficiently.

Crane rUnway Surveys

Regular surveys of crane runways have a significant impact on the service life of various crane components. Surveys can be carried out quickly and easily with our patented LMS laser measuring system. Operating sequences hardly need to be interrupted and no additional measures such as protective barriers or temporary clearance of the building are necessary.

MoDerniSation/refUrbISHMent

Operating requirements may change during the service life of cranes and components and, particularly in the case of older installations, higher operating costs are often incurred. Demag modernisation and refurbishment concepts extend the range of application, cut costs and open up previously unused capacity of your installation.



Fast and reliable

www.demagShop.com

The Demag online shop – simple and reliable selection of Demag products

You can find our genuine Demag spare parts and everything you need for lifting and materials handling at **www.demagshop.com**. Use the simple and user-friendly system to configure all Demag products from spare parts to complete crane installations.

Direct order system access for

- More than 16,000 ident. number parts for products
- Product configuration to meet your individual needs via the Demag Designer tools

inforMation 24/7

- List and net prices
- Stock availability and delivery times
- Order history and consignment tracking
 - for Demag Shop orders
 - also for all orders placed by conventional methods
- Quotation history
- Access to the documentation system

Demag Designer tool portal – Configure products to meet your needs

Using our Demag Designer tools, you can configure solutions to meet your specific needs from chain hoists to complete crane installations. When you have selected the product, you can choose from a wide variety of available options to find the best possible solution for your requirements – a simple, reliable and plausible method.

Your direct access to our product configuration tools: www.demag-designer.com

yoUr benefitS:

- Simple handling
- Specify products to meet your needs
- Save your configuration
- Immediate results:
 - Product description
 - Technical data
 - CAD geometry data
 - Circuit diagrams
 - Documentation
- Online ordering via Demag Shop



40718-2

Simple project engineering

www.demag-deSigner.com



41005-5

BRIEF OVERVIEW

Modular design

- C-design and co-axial design
- Four hoist unit/travelling hoist types

Easy to service

- Optimised component parts for long service life
- Simple replacement of wearing parts

Precision

- Hoist inverter and frequency-controlled cross-travel motors
- Optional: mechanical creep lifting motor

Configure your DMR modular rope hoist:

www.demag-designer.com

Office & Works :

Pune Office :

GAT No. 330 - 334, Nanekarwadi (Chakan)
Tal. Khed, Dist. Pune 410501, Maharashtra, India

Phone: +91 2135 614 200

Fax: +91 2135 614 300

Email: demag.india@demagcranes.com

www.demagcranes.co.in

Regional Offices

Ahmedabad : demag.ahmedabad@demagcranes.com

Bangalore : demag.bangalore@demagcranes.com

New Delhi : demag.delhi@demagcranes.com

Kolkata : demag.kolkata@demagcranes.com

Chennai : demag.chennai@demagcranes.com